



PV INVERTER



PV Inverter


3KW, 5KW, 15KW

Grid-tie systems are the most cost effective and easiest systems to install. But in a pure grid tie system you will have no power supply if there is a power shedding. To solve this problem, you can connect IG series PV inverter to the output of TBB Kinergier Pro bi-directional inverter to compose an AC-Coupled system.

- High frequency switching technology
- Dual MPPT design with precise MPPT algorithm
- Max efficiency: 98.7%
- Available with single phase and three phase
- Integrated data communication : Rs485 and WIFI / GPRS
- (optional)

IG series PV inverter are designed especially for AC coupling system, featuring great system stability and extraordinary dynamic response. It could follow the control of AC coupling system and real time data can be consolidate into system monitor as well.

AC Coupling System

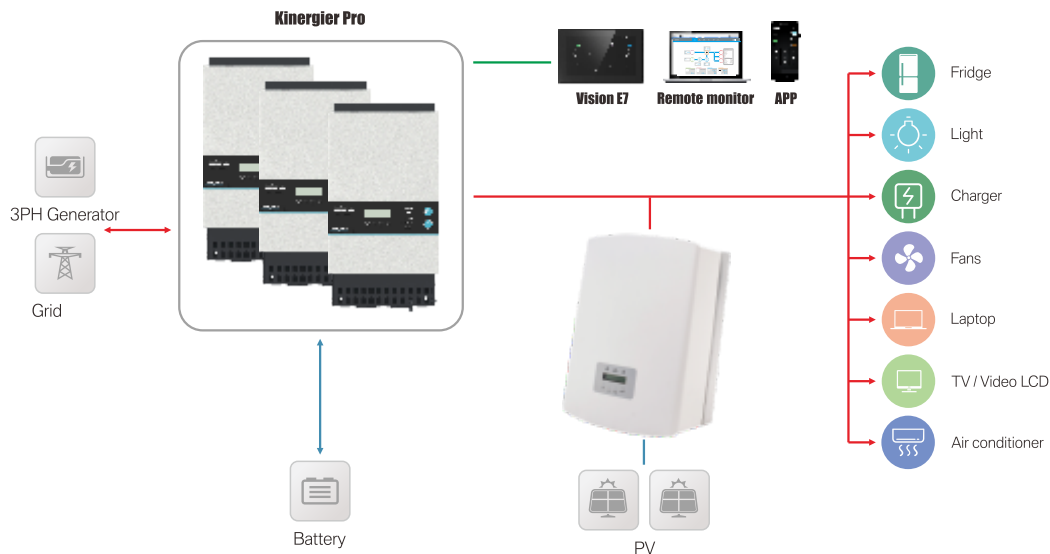



Model No.	IG3.0	IG5.0	IG15.0
Phase	single phase	single phase	three phases

Input Side (DC)

Max. DC input power (KW)	3.5	5.8	18
Max. DC input voltage (V)	600		1000
Start-up voltage (V)	120		180
MPPT voltage range (V)	90-520		160-850
Max. input current per MPPT (A/B)	11A + 11A		22A + 22A
MPPT number / Max input strings number	2 / 2		2 / 4

Output Side (AC)

Rated output power (KW)	3	5	15
Max. apparent output power (KVA)	3.3	5	16.5
Max. output power (KW)	3.3	5	16.5
Rated grid voltage (V _L)	220 / 230		400
Rated grid frequency (Hz)	50 / 60		
Operation phase	single		three
Rated grid output current (A)	13.6 / 13	22.7 / 21.7	21.7
Max. output current (A)	15.7	25	23.8
Power factor (at rated output power)	0.8 leading ... 0.8 lagging		
THDi	< 3%		< 1.5%
DC injection current (mA)	< 0.5% I _n		
Grid frequency range (Hz)	46~52.7 Hz or 56~62.7 Hz		

Other Electrical

Max. efficiency	97.8%	98.1%	98.7%
EU efficiency	97.1%	97.3%	98.1%
MPPT efficiency	> 99.5%		
Protection	DC reverse-polarity; Short circuit; Output over current; Output over voltage; Insulation resistance monitoring; Residual current detection; Surge; Islanding; Temperature		
Integrated DC switch	optional		

General Data

DC connection	MC-4 mateable		
AC connection	terminal cooling		
Display	LCD, 2 x 20Z		
Dimensions (mm)	310W * 543H* 160D		310W * 563H* 219D
Weight (KGs)	11.5		18.9
Topology	transformerless		
Self consumption (night)	< 1W (night)		
Operating ambient temperature range	-25°C ~ 60°C		
Ingress protection	IP65		
Noise emission (typical)	< 30 dBA		
Cooling concept	natural convection		
Max. operation altitude	4000m		
Designed lifetime	> 20 years		
Grid connection standard	En50438, G83/2, G59/3, AS4777.2:2015, VDE0126-1-1, IEC61727, VDEN4105		En50438, G83/2, G59/3, AS4777 VDE0126-1-1, IEC61727, VDEN4105
Relative humidity	0~100%		
Safety / EMC standard	IEC62109-1/2, AS3100		